

Circuit Instructions

- PLEASE ATTEND CLASS TO GET YOUR KIT. ROLL WILL BE TAKEN.
- The "check-off" procedure is that you bring your completed circuit to class on the check-off day.
- Also, for "check-off" bring your written, circuit report with stapled, signed [circuit cover-sheet](#).
- The report *must* be neatly drawn with the template provided in the circuit kit or with a drawing program (Visio, or whatever you want).
- YOUR REPORT MUST ACCOMPANY YOUR CIRCUIT FOR CHECK-OFF
- ALL CIRCUITS MUST BE COMPLETED TO GET A PASSING GRADE IN THE COURSE.
- Students enjoy the circuits, which are easy and fun to build!

Circuit Lecture and Due Dates Instructions

- [Circuit 1](#) due Wednesday, March 4, 2009 Wednesday, March 4

Use the circuit schematics on the web site as a guide. You are not required to provide complete schematics for all LEDs.

Describe in English with references to your schematics why the LED is on/off when the switch is off/on.

Bring in your completed kits to class on Wednesday, March 4!

HW 4 due ~~Friday~~ Monday 2009/03/16

(possible ext. to Wed,
to be confirmed on Friday)

Instructions

- Show all your steps--answers alone are not sufficient.
- Homework must be done neatly.
- Use straight-edged paper (no notebook tear-outs with ragged edges).
- Please STAPLE papers to a signed cover sheet.

Homework Problems

Problem 5.4 (a). Plot the expression on a 4-variable K-map. (10 points)

Problem 5.4 (b). Simplify the K-map from 5.4 (a) into SOP form. Begin with a fresh map. (10 points)

Problem 5.4 (c). Simplify the K-map from 5.4 (a) into POS form. Begin with a fresh map. (10 points)

Problem 5.6 (a). To work, use guideline summary from class; ignore "essential prime implicants." (20 points)

Problem 5.8 (a). (Note that the problem asks for both SOP and POS simplifications.) (20 points)

Problem 5.12 (c). (POS simplification.) (10 points)

Problem 5.21 (b). (Note that POS form is requested even though the problem statement is given in min-terms.) Plot the min-term map, then redraw with 0's, and group the 0's. (20 points)

Ex. on p. 121 top. Find a minimum sum-of-product expression for $f(a,b,c) = \sum m(0, 1, 2, 5, 6, 7)$

$$F = a'b'c' + a'b'c + a'bc' + ab'c + abc' + abc$$

$$\Rightarrow a'b' + \underbrace{b'c + bc'}_{?} + ab \quad (\text{X})$$

$$F = a'b'c' + a'b'c + a'bc' + ab'c + abc' + abc$$

$$\Rightarrow a'b' + bc' + ac \quad (\text{X})$$

abc	$ab + b'c$	ac
000	0	0
001	1	0
010	0	0
011	1	0
100	0	0
101	1	1
110	1	1
111	1	1

Unfortunately, there is no (easy?) way of achieving (X) from (X) without backtracking, using the laws & theorems of p. 52!

Chapter 5

A truth table for two variables (A and B)

		A	
		0	1
B	0		
	1		

Annotations:

- Handwritten orange 'A' above the column headers.
- Handwritten orange 'B' to the left of the row headers.
- Arrows pointing from the text $A = 0, B = 0$ to the top-left cell.
- Arrows pointing from the text $A = 1, B = 0$ to the top-right cell.
- Arrows pointing from the text $A = 0, B = 1$ to the bottom-left cell.
- Arrows pointing from the text $A = 1, B = 1$ to the bottom-right cell.

Veritas
discrepan
caltevmet
hebelif

Section 5.2, p. 121

(a)

<i>A</i>	<i>B</i>	<i>F</i>
0	0	1
0	1	1
1	0	0
1	1	0

(b)

<i>A</i> \ <i>B</i>	0	1
0	1	0
1	1	0

(c)

<i>A</i> \ <i>B</i>	0	1
0	1	0
1	1	0

$A'B'$ → (row 0)
 $A'B$ → (row 1)

$$F = A'B' + A'B$$

(d)

<i>A</i> \ <i>B</i>	0	1
0	1	0
1	1	0


$A'B' + A'B = A'$ → (column 0)

$$F = A'$$

Figure 5-1a, b, c, and d


<i>A</i>	<i>B</i>	<i>C</i>	<i>F</i>
0	0	0	0
0	0	1	0
0	1	0	1
0	1	1	1
1	0	0	1
1	0	1	0
1	1	0	1
1	1	1	0

(a)

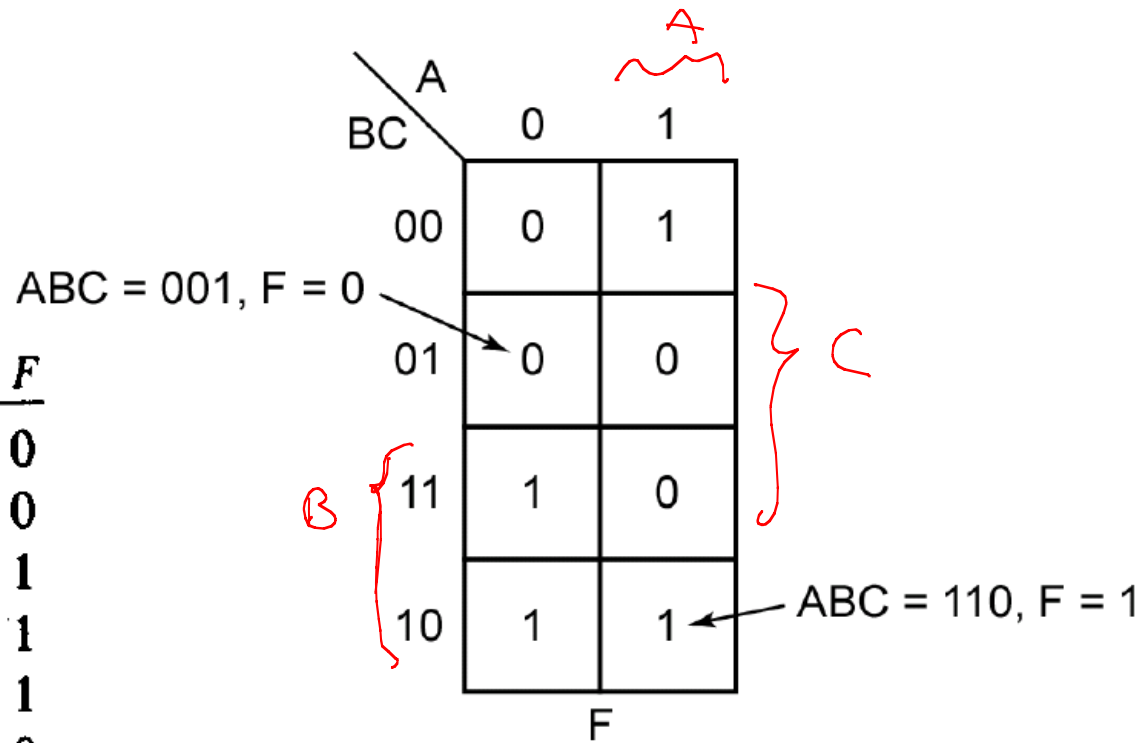


(b)

Figure 5-2: Karnaugh Map for Three-Variable Function

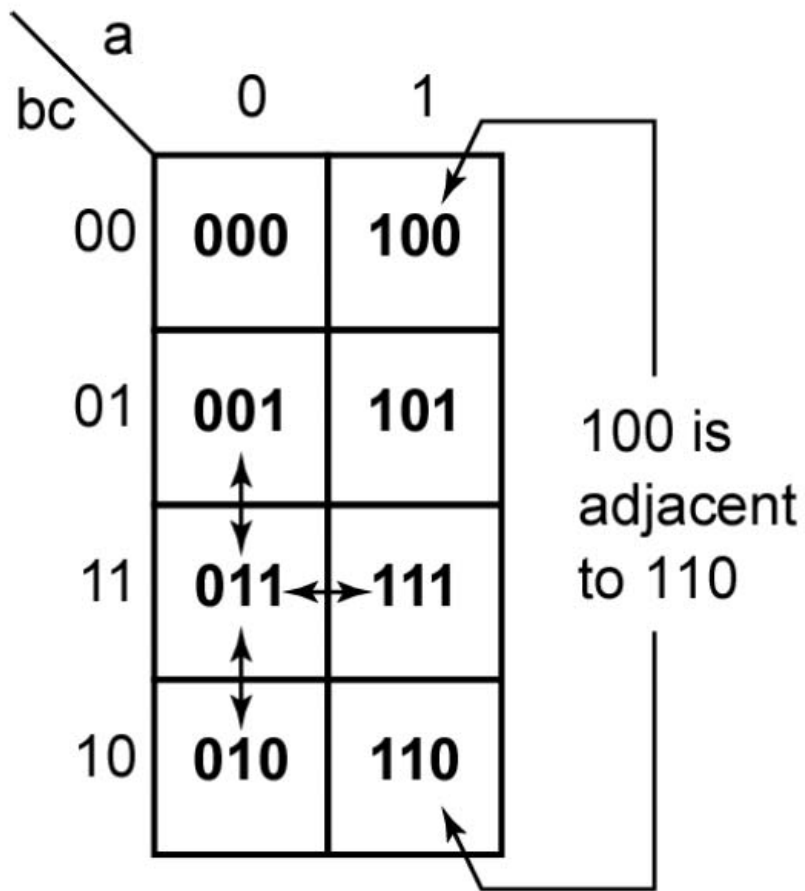

(a) Binary notation

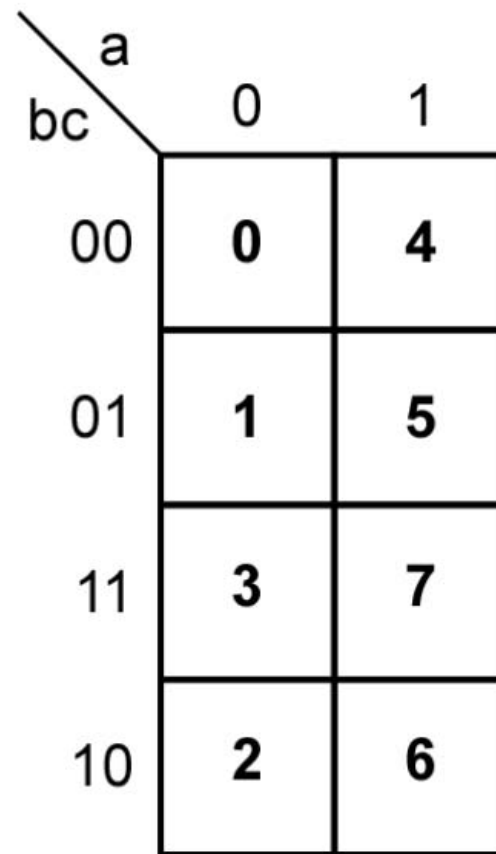

(b) Decimal notation

Figure 5-3: Location of Minterms on a Three-Variable Karnaugh Map

		a	
		0	1
bc	00	0 0	0 4
	01	1 1	1 5
	11	1 3	0 7
	10	0 2	0 6

Figure 5-4: Karnaugh Map of $F(a, b, c) = \Sigma m(1, 3, 5) = \Pi M(0, 2, 4, 6, 7)$


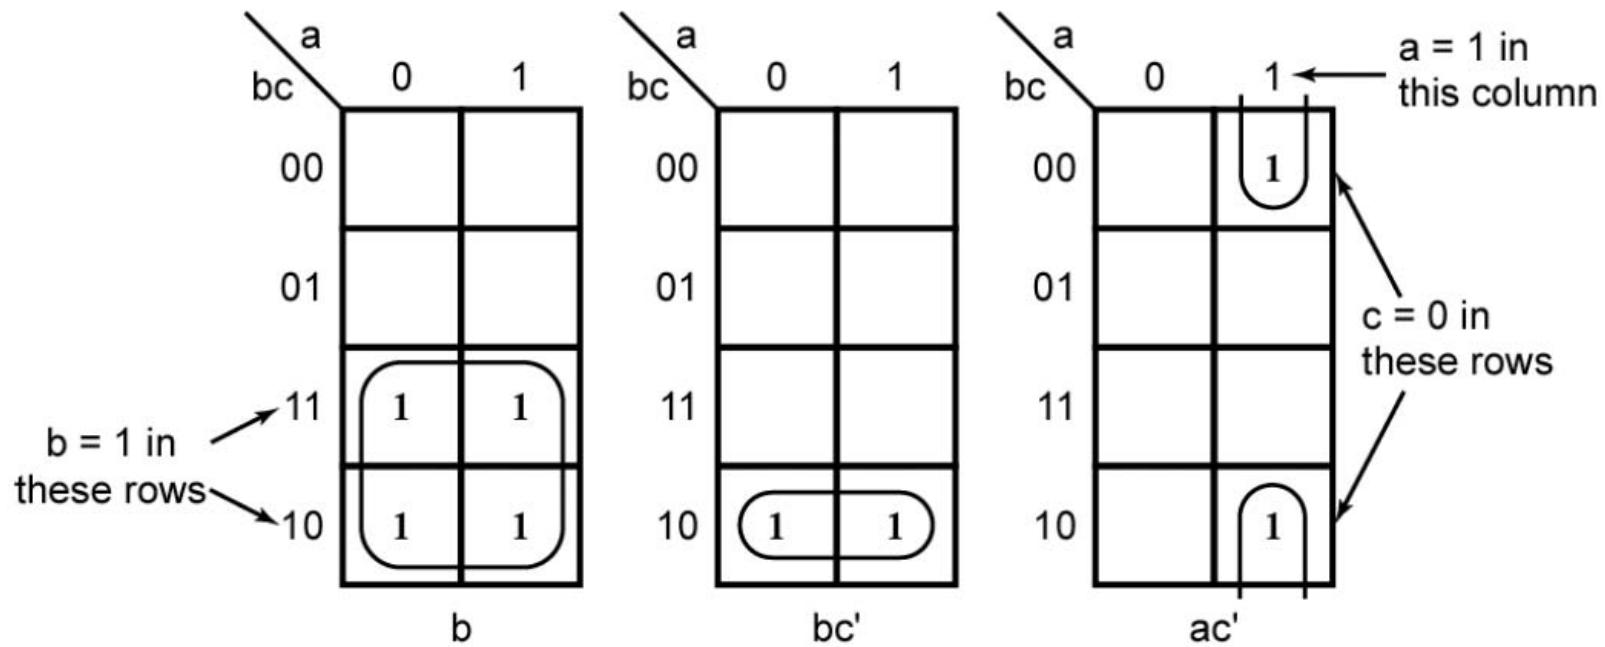


Figure 5-5: Karnaugh Maps for Product Terms

$$f(a,b,c) = abc' + b'c + a'$$

1. The term abc' is 1 when $a = 1$ and $bc = 10$, so we place a 1 in the square which corresponds to the $a = 1$ column and the $bc = 10$ row of the map.
2. The term $b'c$ is 1 when $bc = 01$, so we place 1's in both squares of the $bc = 01$ row of the map.
3. The term a' is 1 when $a = 0$, so we place 1's in all the squares of the $a = 0$ column of the map. (Note: Since there already is a 1 in the $abc = 001$ square, we do not have to place a second 1 there because $x + x = x$.)

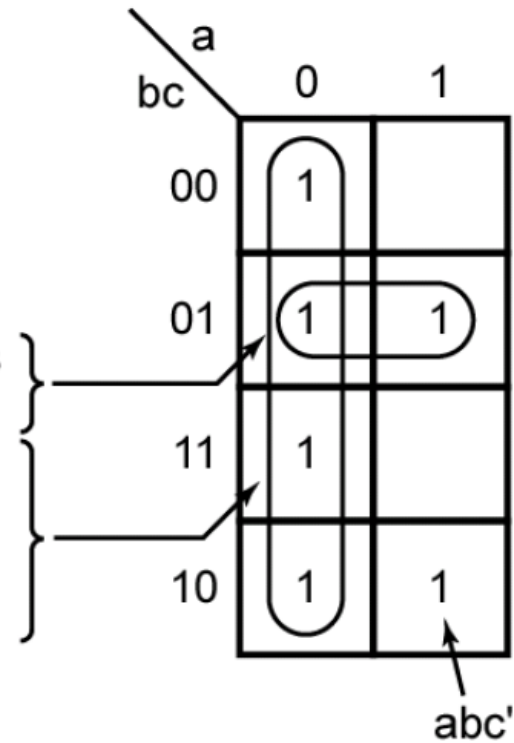

Section 5.2, p. 124

$$f = a'b'c + a'bc + ab'c = a'c + b'c$$

	a	
bc	0	1
00		
01	1	1
11	1	
10		

$$F = \sum m(1, 3, 5)$$

(a) Plot of minterms

	a	
bc	0	1
00		
01	1	1
11	1	
10		

$$T_1 = a'b'c + a'bc = a'c$$

$$T_2 = a'b'c + ab'c = b'c$$

$$F = a'c + b'c$$

(b) Simplified form of F

Figure 5-6: Simplification of a Three-Variable Function

